




CSS-100, CSS-135, CSS-160 and CSS-270

Pre-cut cable straps ranging from 10" to 27" long with locking head installed.



CSS-50R

50 ft reel of cable strap- can be cut to any desired length.

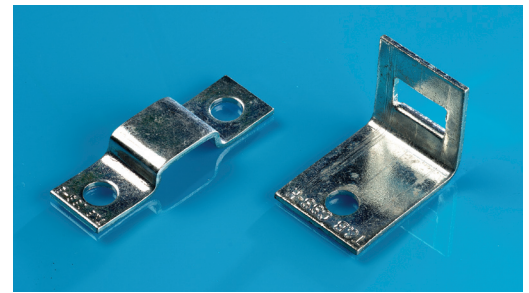

CSS-B

Zinc-plated steel base for vertical cable or wire runs.

CSS-H

Zinc-plated steel hanger for horizontal cable or wire runs.



CSS-LH

Acetal plastic head with integral marine grade silicon bronze locking device



TCP-360

Stackable 1/2" spacer for use with telecom cables. Can be rotated 90° to accommodate large or multiple cables.



CSS-360

Stackable 1/2" spacer designed with smooth body surface to prevent deformation of coaxial and fiber optic cables.



WT3D

Use for tightening and cutting Deltec cable support straps. Safe and easy to use, cuts strap flush with locking head - no sharp edges!



TC5359

Nylon mounting base for masonry and brick surfaces, requires 3/8" pre-drilled hole.



Deltec Kit CSS-5K, CSS-10K

Locking heads and 50 ft reels of cable strap available in bulk packs of 5 or 10 reel kits


ORDERING INFORMATION

CATALOG#	DESCRIPTION
DELTEC® CABLE SUPPORT SYSTEM	
CSS-100	Cable Strap with head, 10.0" long
CSS-135	Cable Strap with head, 13.5" long
CSS-160	Cable Strap with head, 16.0" long
CSS-270	Cable Strap with head, 27.0" long
CSS-50R	50 foot Reel of Strap
CSS-5K	5 Reels Cable Strap, 150 locking heads
CSS-10K	10 Reels Cable Strap, 300 locking heads
CSS-B	Base
CSS-H	Hanger
CSS-LH	Locking Head
TCP-360	Modular Stackable Cable Spacer
CSS-360	Modular Stackable Spacer for Fiber and Coax Cable
WT3D	Installation/Cutting Tool
TC5359	Mounting Base for Masonry

Please ask your Thomas & Betts representative for a complete catalog of quality Thomas & Betts products or visit us at www.tnb.com. For customer service, call **1-800-685-9452**. For technical questions, call **1-888-862-3289**.

© 2006 Thomas & Betts Corporation. All rights reserved.

Thomas & Betts Corporation
Communications Products Group
Tel: 800-920-0328 • 901-252-5000
Fax: 800-283-6756 • 901-252-1389

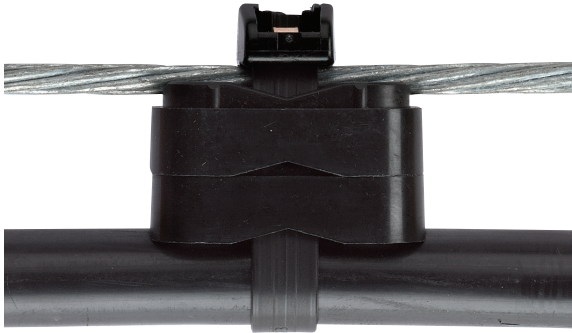


DELTEC® CABLE SUPPORT SYSTEM

Provides a strong, long-life and cost saving method of securing communication cables

The Deltec® Cable Support System is a user-friendly product designed to provide fast, effective fastening of communications cables to messenger strand. It is equally well suited for copper conductor cable, coaxial cable, fiber optic cable and inner duct in aerial applications.

The Deltec® System answers your aerial cable needs with innovative design and state of the art materials. UV, weather resistant acetal plastic cable straps, marine grade locking devices and plated steel hanger accessories combine to provide a system that can meet your specific needs.


Deltec® cable strap is available in standard lengths of 10 to 13.5, 16 and 27 inches as well as in convenient 50 foot reels to reduce waste and allow custom sizing by the technician in the field. Additional "standard" lengths can be established for applications where higher volumes prevail.



TCP-360 provides desired spacing between messenger and telecom cables in 1/2" increments



CSS-360 spacer can be used with fiber optic or coaxial cable in single or multiple cable applications



CSS-H zinc plated steel hanger for horizontal runs, installs easily on any surface



CSS-B zinc plated steel base provides additional strength for vertical cable runs

- Proven years of service
- No sharp edges - Craft-Friendly! Cable Friendly!
- Ease of installation - one wrap, no re-threading of strap
- Lowers installation costs
- High tensile strength
- Total flexibility in strap length
- Stackable spacers accommodate all requirements - no need to stock multiple sizes of individual height spacers.

STRAP AND BODY

- Acetal Plastic Construction
- Offers Superior Resistance to Sunlight, Moisture and High Salt Environments.

LOCKING DEVICE

- Marine Grade Corrosion-Resistant Silicon Bronze

INSTALLATION RANGE

- -30° F to 150° F

MINIMUM TENSILE STRENGTH

- 250 Pounds

OUTDOOR LIFE

- Designed to Last a Minimum of 20 Years

CONTINUOUS LOAD

- 20 Pounds

Please ask your Thomas & Betts representative for a complete catalog of quality Thomas & Betts products or visit us at www.tnb.com. For customer service, call **1-800-685-9452**. For technical questions, call **1-888-862-3289**.

© 2006 Thomas & Betts Corporation. All rights reserved.

Thomas & Betts Corporation
Communications Products Group
Tel: 800-920-0328 • 901-252-5000
Fax: 800-283-6756 • 901-252-1389